

CHEVRON

Chevron/herringbone - Solid 3-layered 15/4

General information

This document is representing information about the Chevron Parquet produced Solid 3-layered 15/4 mm wood flooring boards.

Product of use

This floor is for indoor use only and may be installed:

- with nail down, staple, screw or glue down installation methods,
- over plywood or OSB subfloor or glued down directly over concrete,

This floor should NOT be installed:

- on sub-floor with absolute moisture content over 2.5%.
- This must be measured and documented using the correct equipment. Visual checks are not sufficient.
- other rooms with excessive moisture

Use of this product in any of these applications will void the product warranty.

Packaging

Boards comes in sealed, wrapped plastic, packages.

Normal volume in each package are 0.8-1.0 square meters.

Number of chevron boards in each package are depending on the dimension of the boards.

Contact us for more information about your specific order.

Underfloor heating

Suitable for underfloor heating

For more information and instructions see separate documentation for installing recommendations.

Chevron/herringbone - Solid 3-layered 15/4

Technical information

Quality standards

As a natural product, wooden flooring boards always has variations in colour, texture and appearance and other visual imperfections.


Wood species:	European Oak
Thickness:	15 mm
Wear layer:	4 mm, Oak
Core:	8 mm, Birch, Oak, Ash or Spruce
Bottom	3 mm, Birsch, Oak, Ash or Spruce
Profile:	Tongue and groove all four sides
Bevel:	4 sides or none
Deviation of thickness:	+/- 0,25 mm
Deviation of length:	According to the product type mm +/- 0,2% of length
Deviation of width:	+/- 0,25 mm
Cup:	≤ 0,25% of plank width
Bow:	≤ 0,15% of plank length
Spring:	≤ 1% of plank length
Formaldehyde Emission:	E1
Moisture concent:	8 % +/- 1 %
Angle:	From 45 to 90 degrees +/- 0,1 degree
Weight per m ²	11 kg
Avarage brinell hardness, Oak	3,8
Adhesive used in product:	Kiilto Pro Kestokol D 4600, EN 204 D4 classified Glue consumption per m ² - 300 g (2,72 % of total weight) For mor technical information see seperate data sheets

Chevron - Solid 3-layered 15/4

Technical information

Construction

Solid 3-layered 15/4 mm

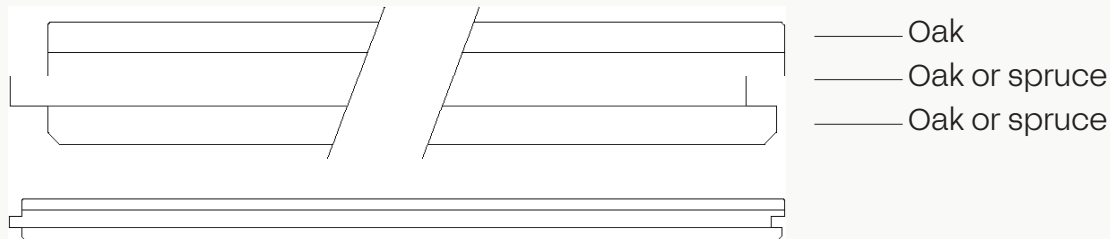

Characteristics - Select/Nature

Sapwood:	Not allowed
Color variation:	Smooth
Knots:	Occasional live knots up to 10mm. Dead knots not

Characteristics - Classic

Sapwood:	Not allowed
Color variation:	Mild
Knots:	Might occur live knots up to 30mm. Dead knots not